

REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG




- Material
①Screws : M4.0 steel, Ni plated
②Terminal : Brass, Tin plated
③Housing : PA66,UL94V-0

- Electrical UL IEC
Rated voltage : 300V 750V
Rated current : 25A 32A
Insulation resistance: 500MΩ/DC500V
Withstanding Voltage : AC2000V/1min
Wire range: 22-12AWG 4.0mm²


- Mechanical
Operating temperature:-40℃~+105℃
Soldering temperature:250℃±5/5sec
Torque: 1.2N.m (10.53Lb.in)

HOW TO ORDER

KF-10000-10.0-XXP-1 X-XXXXX

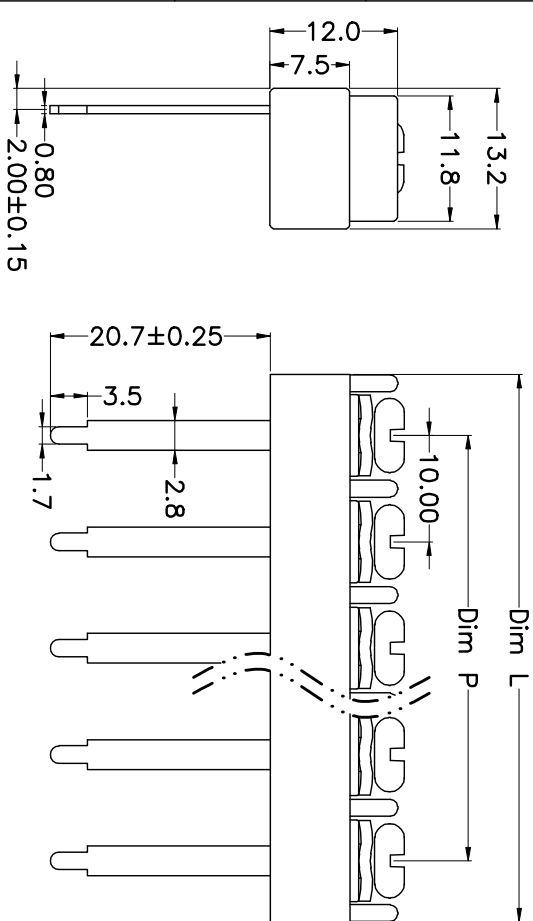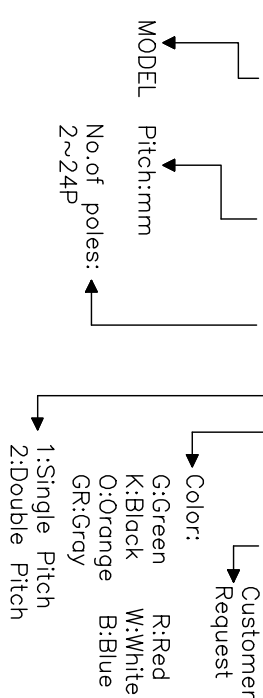

P.C.B.LAYOUT

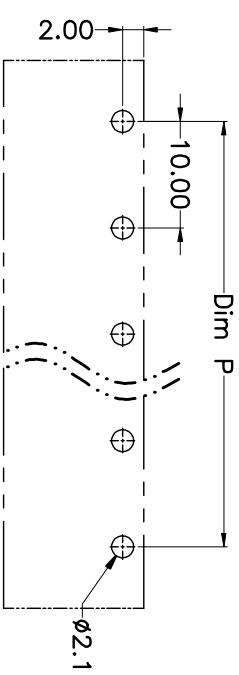

N=Number of Poles
Dim P=(N-1)X10.00
Dim L=Nx10.00+1.5

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

PROJECTION	TITLE	KF-10000-10.0-XXP	
UNITS	mm		
SHEET SIZE	A4	SERIES	KF-10000