

REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG





- Material
ØScrews : M4.0 steel, Ni plated
ØHousing : PA66,UL94V-0
ØTerminal : Brass, Tin plated

- Electrical UL IEC
Rated voltage : 300V 750V
Rated current : 25A 32A
Insulation resistance: 500MΩ/DC500V
Withstanding Voltage : AC2000V/1min
Wire range: 22-12AWG 4.0mm²

- Mechanical
Operating temperature:-40℃~+105℃
Soldering temperature:250℃±5/5sec
Torque: 1.2N.m (10.53Lb.in)

HOW TO ORDER

KF-45H-9.5-XXP-1 X-XXXXX

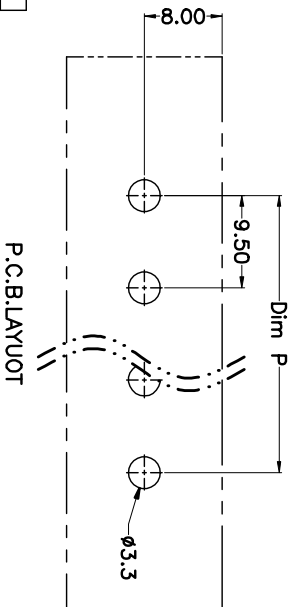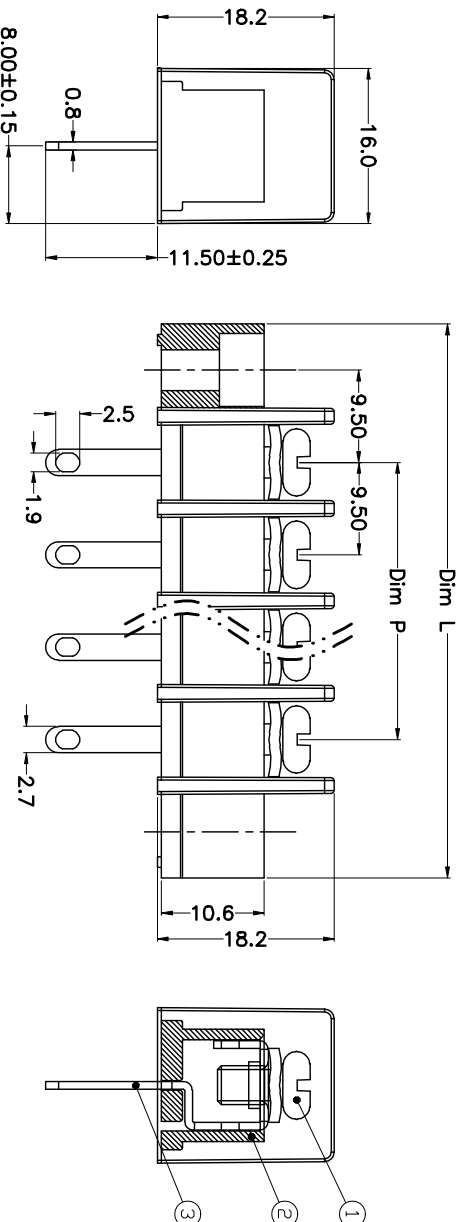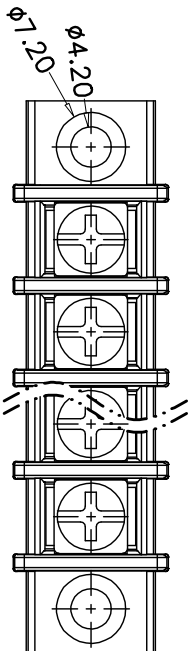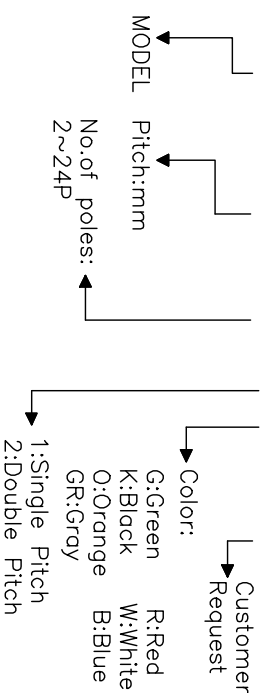

N=Number of Poles Dim P=(N-1)x9.50 Dim L=Nx9.50+19			
Poles	Dim P	Dim L	
2-6P	±0.10	±0.15	
7-12P	±0.20	±0.20	
13-18P	±0.25	±0.30	
19-24P	±0.30	±0.40	

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.5	X.	±5°
.X	±0.3	.X	±3°
.XX	±0.1	.XX	±1°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	XP0012016-xxxx		

PROJECTION	TITLE	KF-45H-9.5-XXP	
UNITS	mm		
SHEET SIZE	A4	SERIES	KF-45H

KAIFENG ELECTRONIC **慈溪市凯峰电子有限公司** CIXI KAIFENG ELECTRONIC CO.LTD