

REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG



- Material
①Screws : M4.0 steel, Ni plated
②Housing : PA66,UL94V-0
③Terminal : Brass, Tin plated

- Electrical
UL IEC
Rated voltage : 300V 750V
Rated current : 25A 32A
Insulation resistance: 500M Ω /DC500V
Withstanding Voltage : AC2000V/1min
Wire range: 22-12AWG 4.0mm²

- Mechanical
Operating temperature:-40℃~+105℃
Soldering temperature:250℃ $\pm$ 5/5sec
Torque: 1.2N.m (10.53lb.in)

HOW TO ORDER

KF-55H-10.0-XXP-1 X-XXXXX

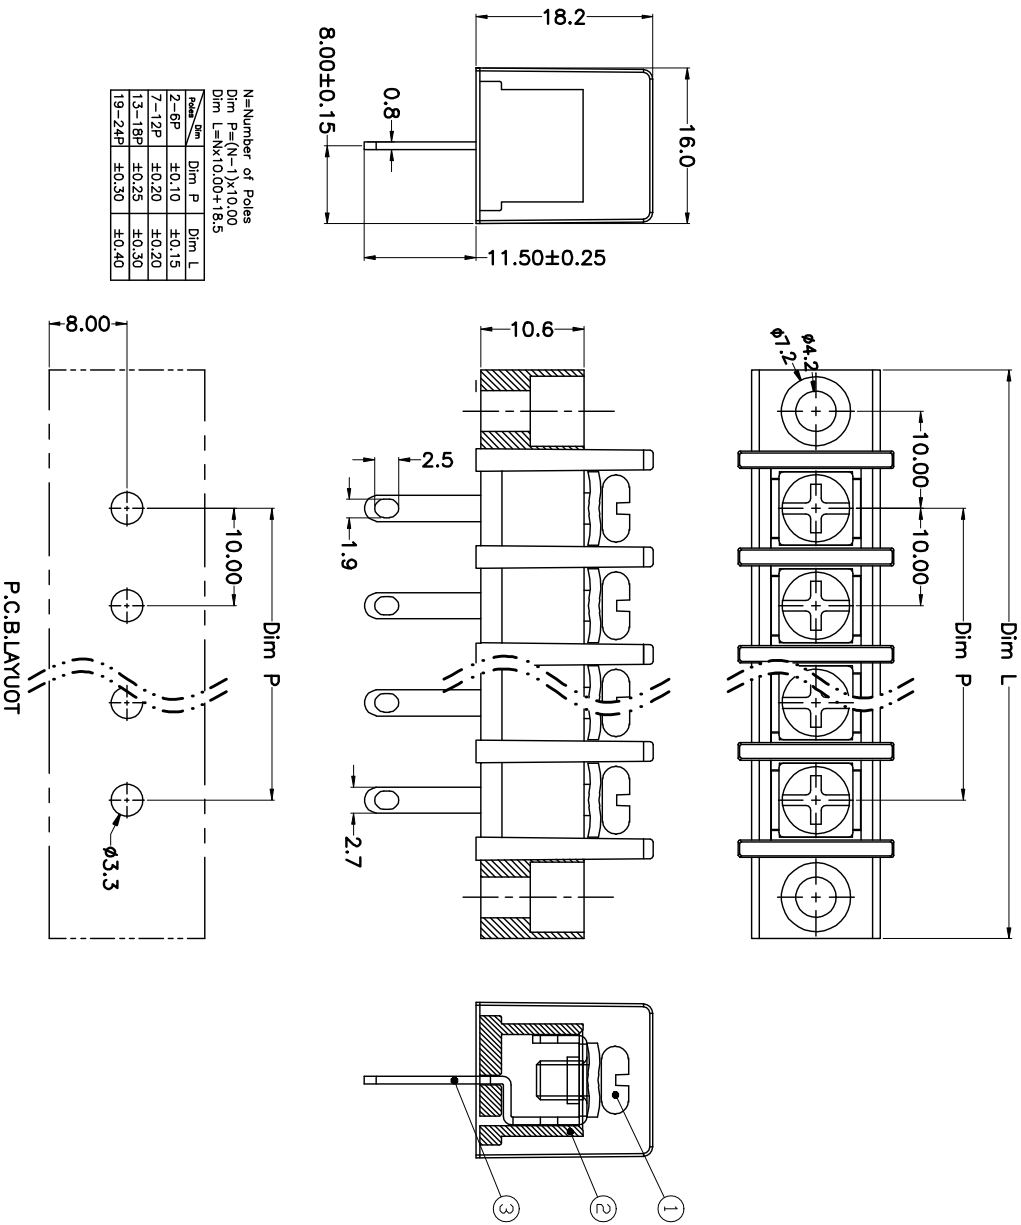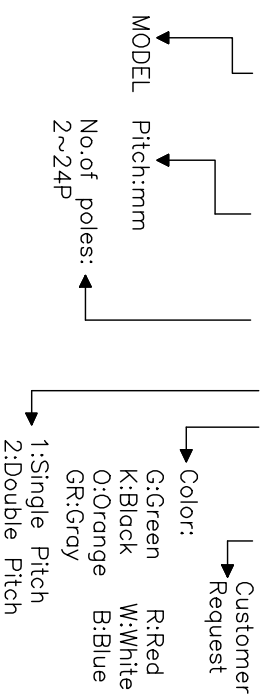

N=Number of Poles Dim P=(N-1)X0.50 Dim L=Nx(10.00+18.5)			
2-6P	±0.10	±0.15	
7-12P	±0.20	±0.20	
13-18P	±0.25	±0.30	
19-24P	±0.30	±0.40	

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.5	X.	±5'
.X	±0.3	.X	±3'
.XX	±0.1	.XX	±1'
DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	XP0012016-xxxx		

PROJECTION	TITLE
UNITS	mm
SHEET SIZE	A4
SERIES	KF-55H

DF 慈溪市凯峰电子有限公司
KAIFENG ELECTRONIC CIXI KAIFENG ELECTRONIC CO.,LTD