

REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG





- Material
①Housing : PA66,UL94V-0
②Screws : M3 steel, Ni plated
③Terminal : Brass, Tin plated

- Electrical
UL IEC
Rated voltage : 300V 750V
Rated current : 25A 32A
Insulation resistance: 500M Ω /DC500V
Withstanding Voltage : AC2000V/1min
Wire range: 22-12AWG 4.0mm²

- Mechanical
Operating temperature:-40℃~+105℃
Soldering temperature:250℃±5/5sec
Torque: 0.5N.m (4.43lb.in)

HOW TO ORDER

KF-9500-9.5-XXP-1 X-XXXXX

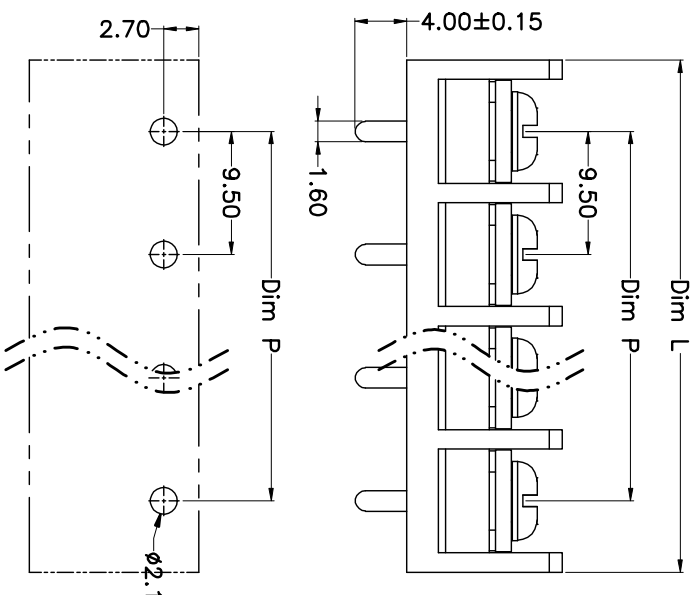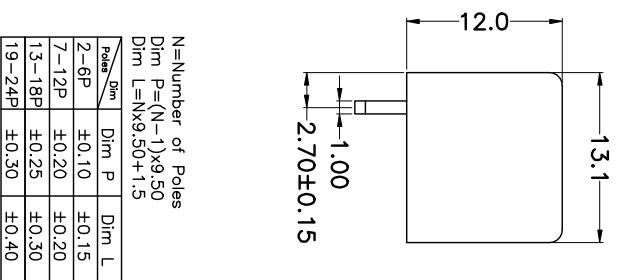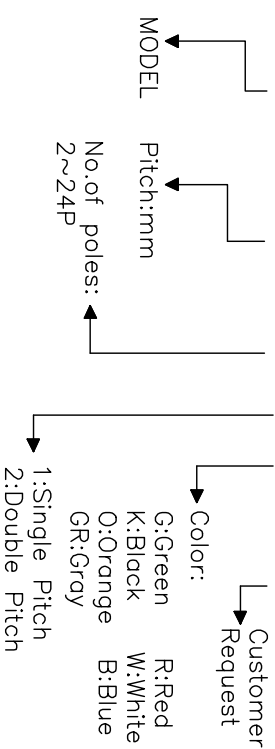

N=Number of Poles
Dim P=(N-1)×9.50
Dim L=N×9.50+1.5

Poles	Dim P	Dim L
2-6P	±0.10	±0.15
7-12P	±0.20	±0.20
13-18P	±0.25	±0.30
19-24P	±0.30	±0.40

P.C.B.LAYOUT

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.5	X'.	±5°
.X	±0.3	.X'.	±3'
.XX	±0.1	.XX'	±1'
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	XP0012016-xxxx		

PROJECTION	TITLE
UNITS mm	KF-9500-9.50-XXP
SHEET SIZE A4	SERIES KF-9500