


REV.	DESCRIPTION	DATE	DRAWN	APPROVED
A1	DWG.REL	2016/10/7	FANG	YANG

- Material
①Screws : M2.0 steel, Zinc plated,“-”slot type
②Housing : PA66, UL94V-0
③Contact : Phosphor bronze,Ni plated
④Clamp : Brass, Ni plated
⑤Cover : PA66, UL94V-0



- Electrical
UL IEC
Rated voltage : 300V 320V
Rated current : 8A 7A
Insulation resistance: 500MΩ/DC500V
Withstanding Voltage : AC2000V/1min
Wire range: 28-16AWG 0.5-1.5mm²

- Mechanical
Operating temperature:-40℃~+105℃
Soldering temperature:250℃±5/5sec
Torque: 0.2N.m (1.77Lb.in)
Strip length: 5-6mm

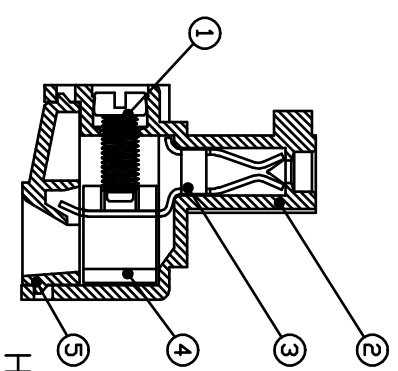


HOW TO ORDER

KF2EDG-Y-5.08-XXP-1 X-XXXXX

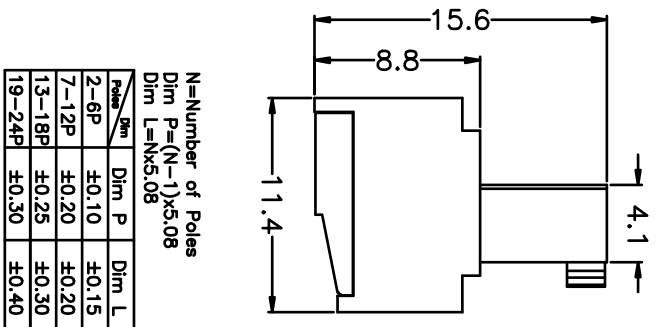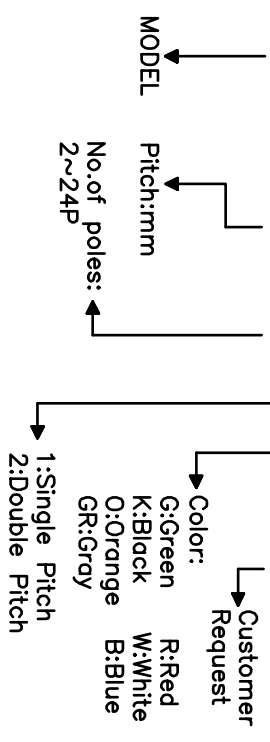

N=Number of Poles
Dim P=(N-1)X5.08
Dim L=Nx5.08

Poles	Dim P	Dim P	Dim L
2-6P	±0.10	±0.15	
7-12P	±0.20	±0.20	
13-18P	±0.25	±0.30	
19-24P	±0.30	±0.40	

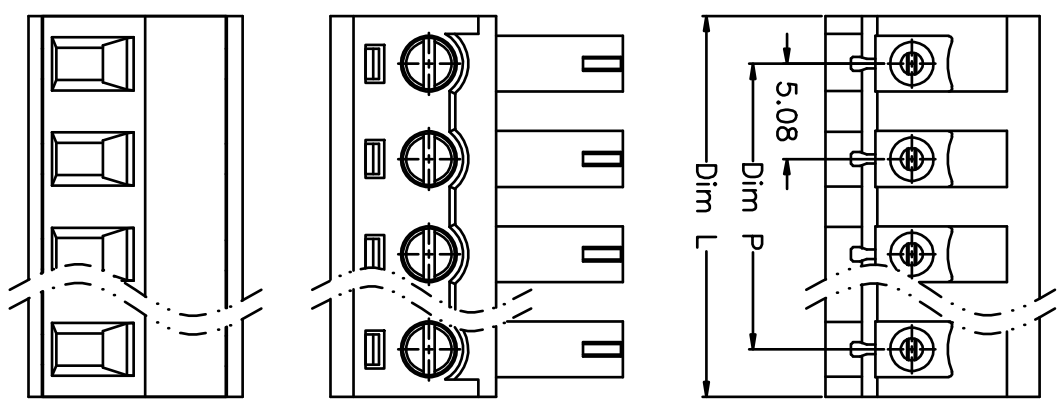

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X, .X	±0.5	X, .X	±5°	mm	A4	KF2EDG-Y-5.08-XXP	
.X	±0.3	.X	±3°			KF2EDG-Y	
.XX	±0.1	.XX	±1°				
DRAWING TYPE		CUSTOMER					
SCALE	1:1	SHEET	1 OF 1				
DRAWING NO.		XP0012016-XXXX					

CIXI KAIFENG ELECTRONIC CO.,LTD	
---------------------------------	--

慈溪市凯峰电子有限公司
CIXI KAIFENG ELECTRONIC CO.,LTD